

# CC-7907WF-21

## 960H Analog IR Bullet Camera



### 720TVL WDR with IR and 3.6mm Fixed Lens

- New 960H chipset for unsurpassed picture clarity
- IP66 rated weatherproof housing
- WDR technology for great low-light performance
- Electronic day/night performance
- 0 lux with IR LEDs on
- 24 IR LED built-in array for IR projection up to 65 feet
- OSD menu for easy set-up with cable mounted mini-controller
- Integral sunshield
- 12vDC operation
- 2 3/4" (width) x 2 1/2" (height) x 6 5/8" (length)



#### Optional Accessory:




**CTL-201**  
Head-end OSD Controller  
Specifically for the CJ-2907WF-24

Contact your Crest Representative today  
to learn more about this product!




# Product Data: CC-7907WF-21 960H Analog IR Bullet Camera

Front View



Side View

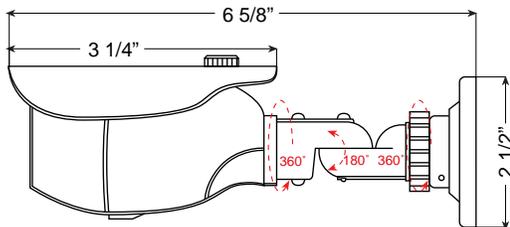

- Model Number**
- Product Description**
- Image Pick-Up Device**
- Certifications**
- Horizontal Resolution**
- Minimum Illumination**
- S/N Ratio**
- Shutter Speed**
- Auto Gain Control**
- Auto White Balance**
- Scanning System**
- Gamma Characteristic**
- Lens Furnished**
- Synchronous System**
- Video Output**
- Infrared Luminary**
- Projection Distance**
- Power Supply**
- Power Consumption**
- Operating Temperature**
- Dimensions**

<b>CC-7907WF-21</b>	
<b>Product Description</b>	Outdoor 960H WDR Infrared Bullet Camera
<b>Image Pick-Up Device</b>	1/3" Sony Super HAD II Effio-A CCD 720TVL
<b>Certifications</b>	IP66
<b>Horizontal Resolution</b>	720 TV Lines
<b>Minimum Illumination</b>	0 Lux (IR LED on)
<b>S/N Ratio</b>	More than 52dB
<b>Shutter Speed</b>	1/60-1/100,000s
<b>Auto Gain Control</b>	Auto / Manual
<b>Auto White Balance</b>	ATW / Push / User 1 / User 2 / Manual / Push Lock
<b>Scanning System</b>	2:1 Interlace
<b>Gamma Characteristic</b>	0.45
<b>Lens Furnished</b>	3.6mm Fixed Lens
<b>Synchronous System</b>	Internal
<b>Video Output</b>	1 Vp-p / 75 ohms, BNC Connector
<b>Infrared Luminary</b>	24 Pieces
<b>Projection Distance</b>	65 feet max
<b>Power Supply</b>	12vDC +/-5%
<b>Power Consumption</b>	500mA min (Camera + IR LED on)
<b>Operating Temperature</b>	-30 ~ 122°F
<b>Dimensions</b>	2 3/4"W x 2 1/2"H x 6 5/8"L

*Specifications subject to change*

