

CP-4707WS-24

Premium Analog Indoor Dome



700TVL 960H+ with IR and 2.8-12mm Varifocal Lens



- 👉 New 960H+ technology for unsurpassed picture clarity
- 👉 WDR technology for great performance in all lighting
- 👉 True day/night performance, utilizing a motorized IR cut filter
- 👉 0 lux with IR LEDs on
- 👉 30 IR LED built-in array with smart IR LED control for IR projection up to 98 feet
- 👉 OSD menu with cable-mounted joystick
- 👉 Internal service monitor connection
- 👉 3-axis internal gimbal mount for easy installation on a wall or ceiling
- 👉 Dual voltage: 12vDC / 24vAC
- 👉 5 1/8" (diameter) x 4 1/8" (height)



Contact your Crest Representative today to learn more about this product!



Product Data: CP-4707WS-24 Premium Analog Indoor Dome

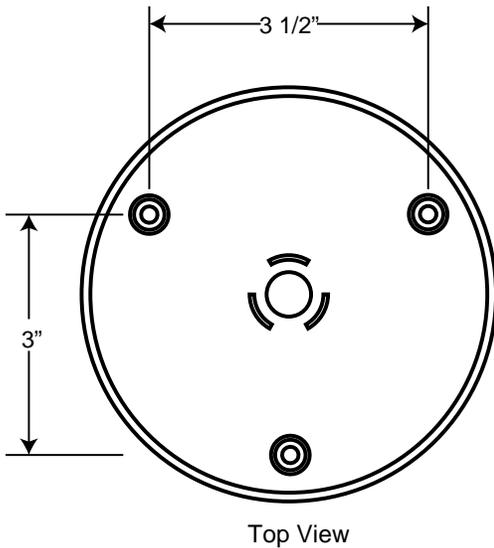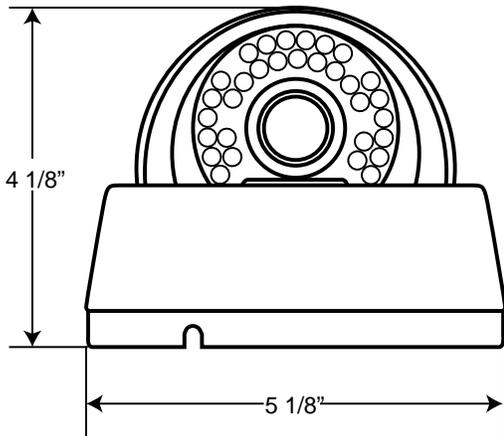

Model Number	CP-4707WS-24
Product Description	Premium 960H+ IR Indoor Dome
Image Pick-Up Device	1/3" 960H IT CCD
Horizontal Resolution	700 TV Lines
Minimum Illumination	0 Lux with IR On
S/N Ratio	More than 50dB
Auto Electronic Shutter	NTSC: 1/60-1/120,000s
Auto Gain Control	User Selectable
Auto White Balance	User Selectable
Back Light Compensation	User Selectable
Scanning System	2:1 Interlace
Gamma Characteristic	0.45
Lens Furnished	2.8-12mm Wide-Depth DC Auto Iris Lens
Synchronous System	Internal
Video Output	1 Vp-p / 75 Ohms, BNC & Internal Monitor Jack
Infrared Luminary	30 pieces Smart IR LED
Wave Length	850nm
Projection Distance	Up to 98 feet
Day/Night Activation	User Selectable
Sense Up	User Selectable
Power Supply	12vDC +/-10% / 24vAC
Power Consumption	360mA on 12vDC / 300mA on 24vAC
Operating Temperature	14 ~ 122°F
Dimensions	5 1/8" (dia) x 4 1/8" (h)

Model Number	CP-4707WS-24
Product Description	Premium 960H+ IR Indoor Dome
Image Pick-Up Device	1/3" 960H IT CCD
Horizontal Resolution	700 TV Lines
Minimum Illumination	0 Lux with IR On
S/N Ratio	More than 50dB
Auto Electronic Shutter	NTSC: 1/60-1/120,000s
Auto Gain Control	User Selectable
Auto White Balance	User Selectable
Back Light Compensation	User Selectable
Scanning System	2:1 Interlace
Gamma Characteristic	0.45
Lens Furnished	2.8-12mm Wide-Depth DC Auto Iris Lens
Synchronous System	Internal
Video Output	1 Vp-p / 75 Ohms, BNC & Internal Monitor Jack
Infrared Luminary	30 pieces Smart IR LED
Wave Length	850nm
Projection Distance	Up to 98 feet
Day/Night Activation	User Selectable
Sense Up	User Selectable
Power Supply	12vDC +/-10% / 24vAC
Power Consumption	360mA on 12vDC / 300mA on 24vAC
Operating Temperature	14 ~ 122°F
Dimensions	5 1/8" (dia) x 4 1/8" (h)

Specifications subject to change

