

# CP-47PS

## 1/3" Pixim Seawolf WDR Indoor Dome




- 600 lines of resolution
- 0.08 lux with f1.2 lens
- Vari-focal 2-12mm auto iris lens
- Full WDR control via internal joystick and OSD
- Latest Pixim Seawolf technology, eliminates glare while providing true WDR low-light performance
- Aesthetic polycarbonate construction
- Compact size – 5 1/8" dia x 3 7/8" h



**Video Security Since 1974**

# Product Data: CP-47PS 1/3" Pixim Seawolf WDR Indoor Dome

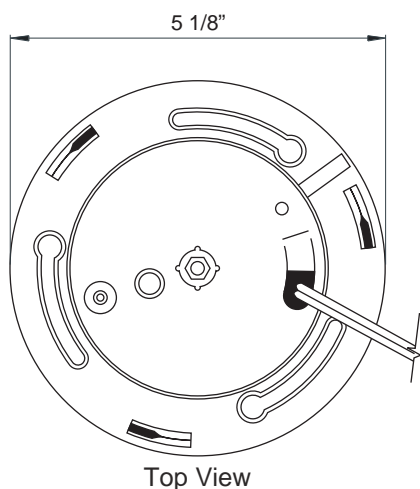

**Model Number**  
**Image Pick-Up Device**  
**Effective Picture Elements**  
**Horizontal Resolution**  
**Minimum Illumination**  
**S/N Ratio**  
**Auto Electronic Shutter**  
**Auto Iris Control**  
**Gamma Characteristic**  
**Lens Furnished**  
**Focal Length/Aperture Ratio**  
**Angle Field of View**  
**Auto Gain Control**  
**Auto White Balance**  
**Back Light Compensation**  
**Scanning System**  
**Synchronous System**  
**Video Output**  
**Power Supply**  
**Power Consumption**  
**Operating Temperature**  
**Dimensions**

CP-47PS	
Model Number	CP-47PS
Image Pick-Up Device	1/3" Pixim DPS – Seawolf
Effective Picture Elements	NTSC: 768x540 (HxV)
Horizontal Resolution	600 TV Lines
Minimum Illumination	0.08 Lux @ F1.2
S/N Ratio	More than 50dB
Auto Electronic Shutter	NTSC: 1/60-1/100,000s, Automatic
Auto Iris Control	DC Drive Iris Control
Gamma Characteristic	0.45
Lens Furnished	2-12mm (DCAI)
Focal Length/Aperture Ratio	f=2~12mm / F1.2~360
Angle Field of View	Wide=78.2°x57.6°; Tele=37.2°x26.8°
Auto Gain Control	Automatic / Manual
Auto White Balance	Automatic / Manual
Back Light Compensation	Automatic / Manual
Scanning System	Interlace 2:1
Synchronous System	Internal, negative sync
Video Output	1 Vp-p / 75 ohms
Power Supply	12vDC
Power Consumption	510mA max
Operating Temperature	14 ~ 122°F
Dimensions	5 1/8" dia x 3 7/8" h

*Specifications subject to change*

 **CREST**  
ELECTRONICS INC  
**Video Security Since 1974**