

# CP-95H-N

## Hi-Def IP WDR Box Camera




- Utilizes state-of-the-art video compression engine – allows real time streaming of true 720p high definition video
- Triple codec – allows simultaneous streaming of three independent video streams, including H.264, MPEG4 and MJPEG, all with individual settings and requirements
- Operates with IPv4 and IPv6 protocols
- True day/night operation utilizing motorized IR cut filter
- Operates on 12vDC or PoE – auto selectable
- Composite video output, for use with test monitor
- Digital image stabilization
- Includes easy-to-use installation software with auto detect feature



 **CREST**  
ELECTRONICS INC  
**Video Security Since 1974**

# Product Data: CP-95H-N Hi-Def IP WDR Box Camera

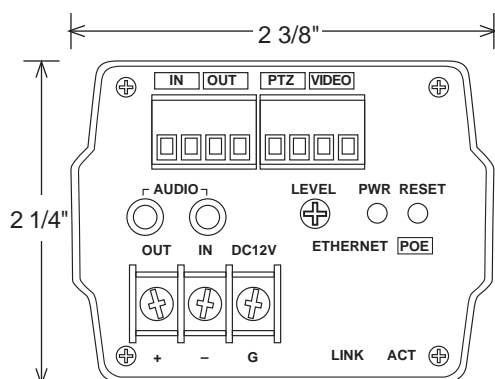

Rear Panel

<b>Model Number</b>	CP-95H-N
<b>Product Description</b>	HD True Day/Night IP Camera
<b>Pick-Up Elements</b>	1/3" Sony 1.3 MPX CMOS
<b>Resolution</b>	720p
<b>Minimum Illumination</b>	4.7 Lux Color; 0.1 Lux B/W @ F1.5
<b>Lens Mount</b>	CS Mount
<b>Auto Iris</b>	Video / DC Drive
<b>White Balance</b>	ATW / AWC
<b>Backlight Compensation</b>	On/Off Selectable
<b>Gain Control</b>	On/Off Selectable
<b>Motorized IR Cut Filter</b>	On/Off/Auto Selectable
<b>Analog Video Output</b>	BNC
<b>Operating Temperature</b>	30°F ~ 114°F
<b>Power Source</b>	12vDC, 600ma, or PoE, Selectable
<b>Dimensions</b>	2 3/8"W x 2 1/4"H x 3 1/2"D
<b>Housing</b>	Extruded Aluminum
<b>Hardware</b>	32 Bit RISC Processor
<b>Operating System</b>	Embedded Linux
<b>Flash Memory</b>	5 DHC Memory Card
<b>Protocol</b>	TCP/IP, DDNS
<b>Interface</b>	10/100 Base T Ethernet (RJ-45)
<b>Compression</b>	M-JPEG or MPEG-4, H.264
<b>Resolutions</b>	CIF, D1, 720p
<b>Frame Rate</b>	30 FPS (720p)
<b>Video Streaming</b>	CBR, VBR, Adjustable Bit Rate

CP-95H-N	
HD True Day/Night IP Camera	
CAMERA	
1/3" Sony 1.3 MPX CMOS	
720p	
4.7 Lux Color; 0.1 Lux B/W @ F1.5	
CS Mount	
Video / DC Drive	
ATW / AWC	
On/Off Selectable	
On/Off Selectable	
On/Off/Auto Selectable	
BNC	
30°F ~ 114°F	
12vDC, 600ma, or PoE, Selectable	
2 3/8"W x 2 1/4"H x 3 1/2"D	
Extruded Aluminum	
NETWORK	
32 Bit RISC Processor	
Embedded Linux	
5 DHC Memory Card	
TCP/IP, DDNS	
10/100 Base T Ethernet (RJ-45)	
M-JPEG or MPEG-4, H.264	
CIF, D1, 720p	
30 FPS (720p)	
CBR, VBR, Adjustable Bit Rate	

Specifications subject to change

