

CP-48PS


Pixim DPS Seawolf WDR Enviro Vandal Dome



- ☞ Latest Pixim Seawolf technology, eliminates glare while providing true WDR low light performance
- ☞ All camera parameters are user selectable via an easy-to-navigate OSD via internal joystick
- ☞ 600 lines of resolution
- ☞ 0.08 lux in b/w mode, 0.1 lux in color – mode activation level user selectable
- ☞ 2.8-11mm auto iris vari-focal lens
- ☞ Vandal proof and water proof housing (IP67)
- ☞ Internal service monitor connection
- ☞ Recessed or surface mount
- ☞ Compact size – only 6" dia x 3 3/4" h

 **CREST**
ELECTRONICS INC
Video Security Since 1974

Product Data: CP-48PS Pixim DPS Seawolf WDR Enviro Vandal Dome

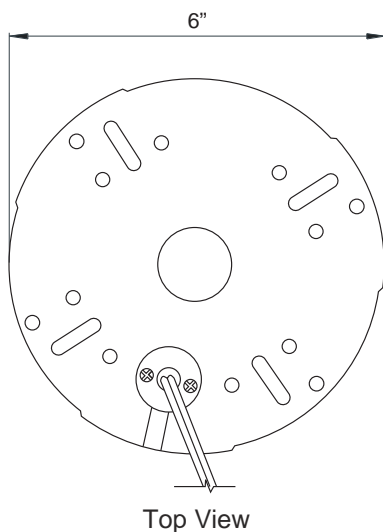

Model Number
Image Pick-Up Device
Effective Picture Elements
Horizontal Resolution
Minimum Illumination
S/N Ratio
Auto Electronic Shutter
Auto Iris Control
Flickerless Mode
Gamma Characteristic
Lens Furnished
Focal Length/Aperture Ratio
Angle Field of View
Auto Gain Control
Auto White Balance
Back Light Compensation
Scanning System
Synchronous System
Video Output
Power Supply
Power Consumption
Operating Temperature
Dimensions

CP-48PS	
	1/3" Pixim DPS – Seawolf
	NTSC: 768x494 (HxV)
	600 TV Lines
	0.08 Lux @ F1.2
	More than 50dB (AGC Off)
	NTSC: 1/60-1/100,000s, ON/OFF Switchable
	DC Drive Iris Control
	NTSC: 1/100s, ON/OFF Switchable
	0.45
	2.8-11mm DCAI
	f=2.8~11mm / F1.2~360
	2.8~11mm = Wide=82.2°x62°; Tele=28.6°x21.5°
	User Selectable
	User Selectable
	User Selectable
	Interlace 2:1
	Internal, negative sync
	1 Vp-p / 75 ohms
	DC 12v / AC 24v dual voltage
	DC 12v, 50/60Hz, 510mA; AC 24v, 50/60Hz, 12w
	14 ~ 122°F
	6" dia x 3 3/4" h

Specifications subject to change

 **CREST**
ELECTRONICS INC
Video Security Since 1974